



COMPRESSION

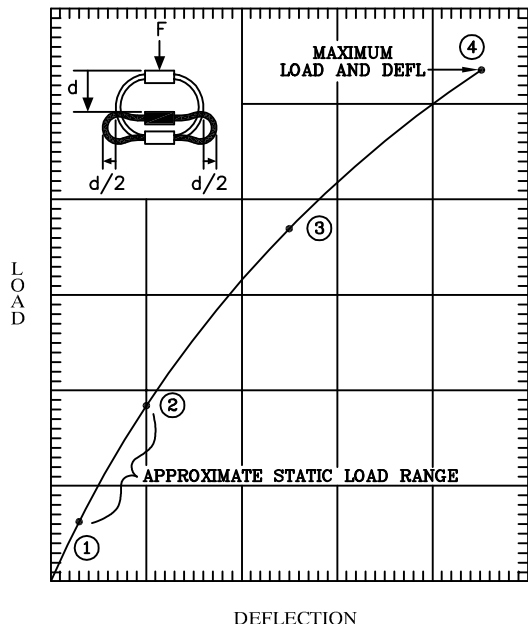

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	450	.10	700	.25	1500	.75	2070	1.50	4500	2025
M16A-350-06	315	.10	525	.25	1300	.88	1850	1.75	3150	1500
M16A-375-06	250	.10	405	.25	1125	1.00	1575	2.00	2500	1125
M16A-425-06	135	.10	225	.25	810	1.25	1175	2.50	1350	650
M16A-490-06	105	.10	180	.25	750	1.50	1080	3.00	1050	500
M16A-540-06	75	.10	120	.25	615	1.75	1000	3.50	750	350
M16A-610-06	60	.10	100	.25	490	2.00	775	4.00	600	240

TENSION

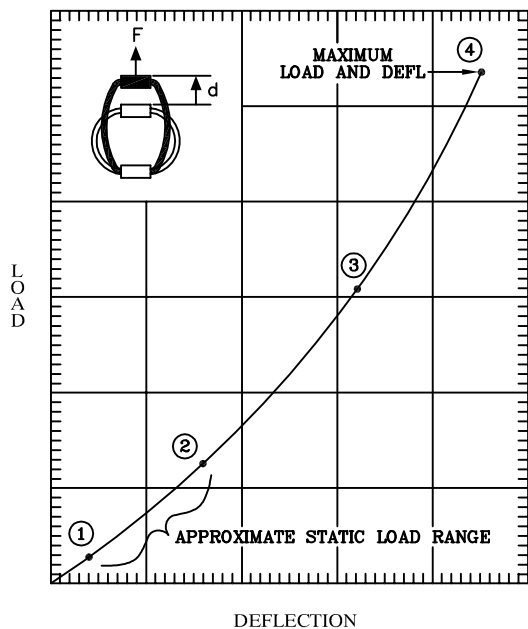


PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	470	.10	1000	.25	1875	.38	4500	.75	4700	4950
M16A-350-06	345	.10	750	.25	1560	.44	3900	.88	3450	3600
M16A-375-06	260	.10	560	.25	1390	.50	3375	1.00	2600	2800
M16A-425-06	150	.10	315	.25	1000	.63	2440	1.25	1500	1600
M16A-490-06	112	.10	255	.25	900	.75	2250	1.50	1120	1200
M16A-540-06	80	.10	170	.25	790	.88	1875	1.75	800	900
M16A-610-06	60	.10	135	.25	620	1.00	1460	2.00	625	640

ULTIMATE BREAKING STRENGTH ≈ 25k lbs

TOLL FREE : 888-ISOLATOR
 FAX : (631) 491-5672
 WEB SITE : www.isolator.com
 E-MAIL : sales@isolator.com
 CAGE : 07QQ7




SHEAR

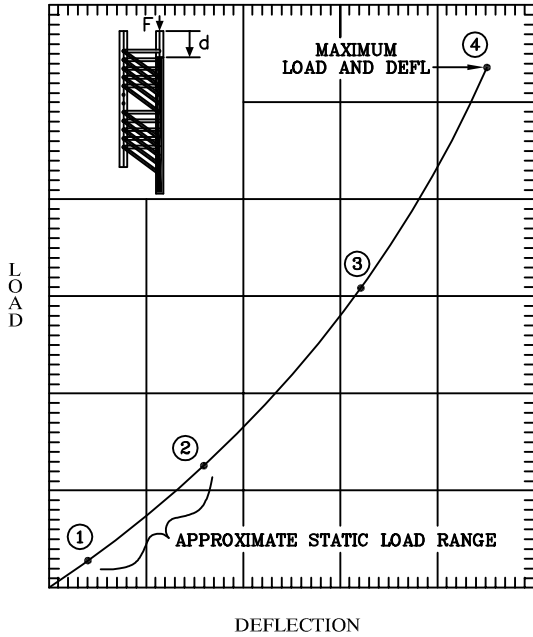


PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	112	.10	230	.25	600	.75	1850	1.50	1120	1200
M16A-350-06	80	.10	170	.25	525	.88	1500	1.75	800	860
M16A-375-06	65	.10	135	.25	450	1.00	1260	2.00	650	710
M16A-425-06	34	.10	75	.25	320	1.25	940	2.50	340	375
M16A-490-06	26	.10	60	.25	300	1.50	860	3.00	260	300
M16A-540-06	19	.10	40	.25	250	1.75	810	3.50	190	225
M16A-610-06	15	.10	34	.25	190	2.00	620	4.00	150	190


ROLL

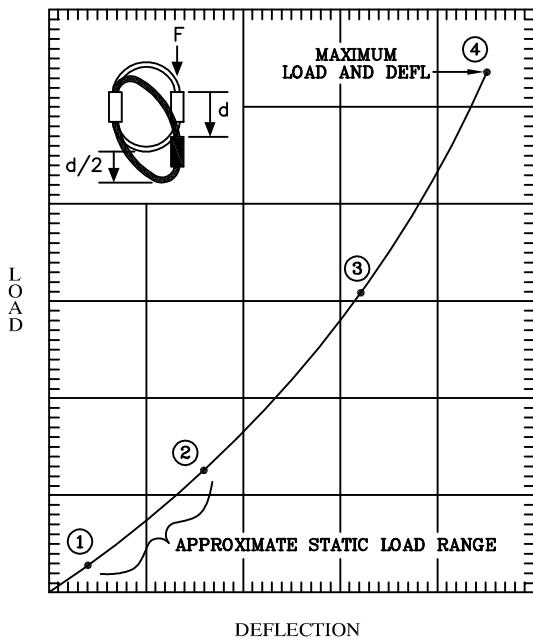

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	112	.10	230	.25	600	.75	1850	1.50	1120	1200
M16A-350-06	80	.10	170	.25	525	.88	1500	1.75	800	860
M16A-375-06	65	.10	135	.25	450	1.00	1260	2.00	650	710
M16A-425-06	34	.10	75	.25	320	1.25	940	2.50	340	375
M16A-490-06	26	.10	60	.25	300	1.50	860	3.00	260	300
M16A-540-06	19	.10	40	.25	250	1.75	810	3.50	190	225
M16A-610-06	15	.10	34	.25	190	2.00	620	4.00	150	190




45° COMPRESSION/ROLL

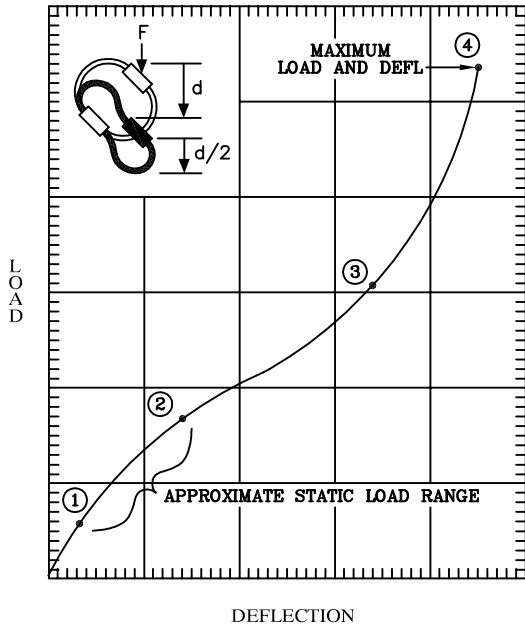

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	280	.10	470	.25	1050	1.50	1300	2.10	2800	940
M16A-350-06	195	.10	350	.25	940	1.75	1170	2.50	1950	560
M16A-375-06	175	.10	270	.25	790	2.00	1000	2.80	1750	410
M16A-425-06	85	.10	150	.25	600	2.50	750	3.50	850	260
M16A-490-06	68	.10	120	.25	540	3.00	690	4.20	680	190
M16A-540-06	50	.10	90	.25	500	3.50	640	5.00	500	150
M16A-610-06	38	.10	68	.25	390	4.00	490	5.60	380	112

45° TENSION/ROLL

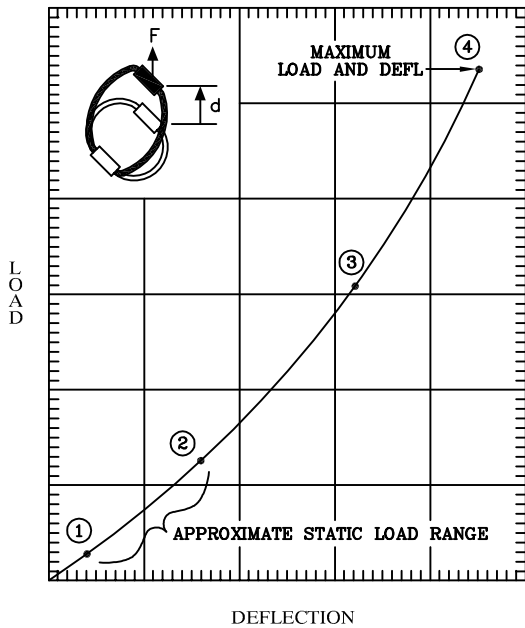

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M16A-325-06	300	.10	620	.25	1500	.50	3750	1.00	3000	3150
M16A-350-06	205	.10	470	.25	1425	.63	3560	1.25	2050	2250
M16A-375-06	170	.10	360	.25	1275	.75	3200	1.50	1700	1800
M16A-425-06	95	.10	190	.25	825	.88	1950	1.75	950	1000
M16A-490-06	750	.10	160	.25	770	1.00	1875	2.00	750	825
M16A-540-06	55	.10	105	.25	630	1.25	1575	2.50	550	600
M16A-610-06	40	.10	90	.25	600	1.38	1500	2.75	400	525

