



COMPRESSION

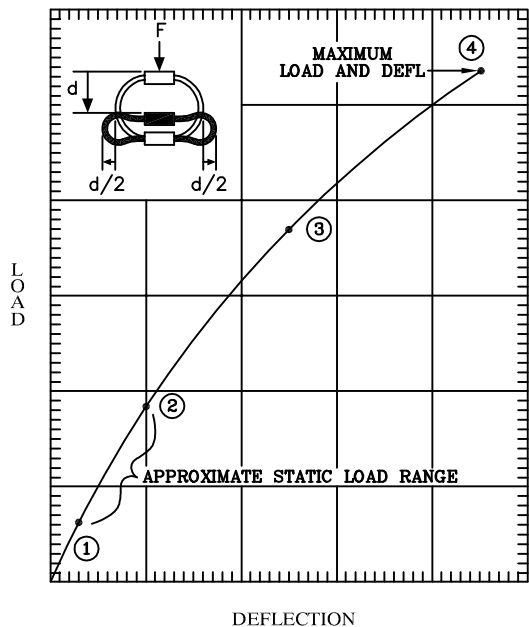

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	1350	.10	3000	.25	11600	1.25	17000	2.50	13500	9300
M40-850-08	900	.10	2000	.25	9600	2.00	14400	4.00	9000	4800
M40-925-08	675	.10	1500	.25	7500	2.50	12000	5.00	6750	3000

TENSION

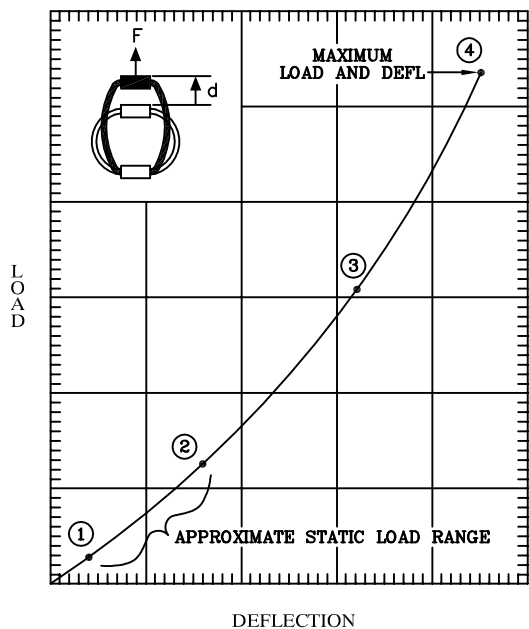


PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	1500	.10	4200	.25	14000	.63	35000	1.25	15000	22000
M40-850-08	1000	.10	2800	.25	11500	1.00	29000	2.00	10000	12000
M40-925-08	700	.10	2100	.25	9000	1.25	22500	2.50	7000	8000

ULTIMATE BREAKING STRENGTH ≈ 150k lbs

TOLL FREE : 888-ISOLATOR
 FAX : (631) 491-5672
 WEB SITE : www.isolator.com
 E-MAIL : sales@isolator.com
 CAGE : 07QQ7




SHEAR

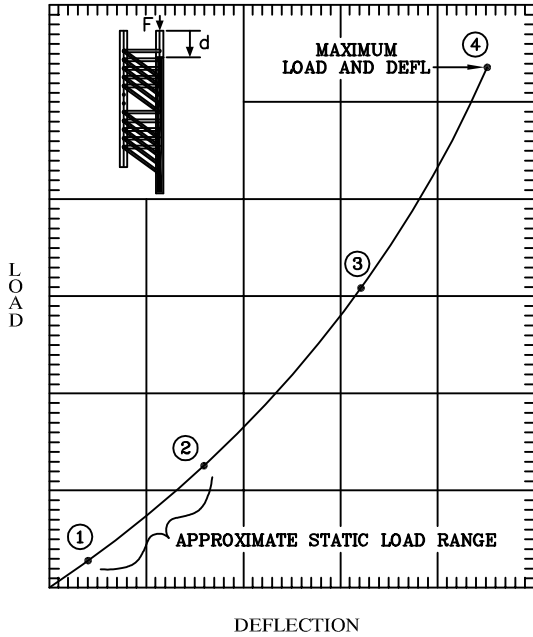

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	350	.10	1000	.25	4600	1.25	13600	2.50	3500	3700
M40-850-08	225	.10	675	.25	3850	2.00	11500	4.00	2250	2400
M40-925-08	175	.10	500	.25	3000	2.50	9600	5.00	1750	1800


ROLL

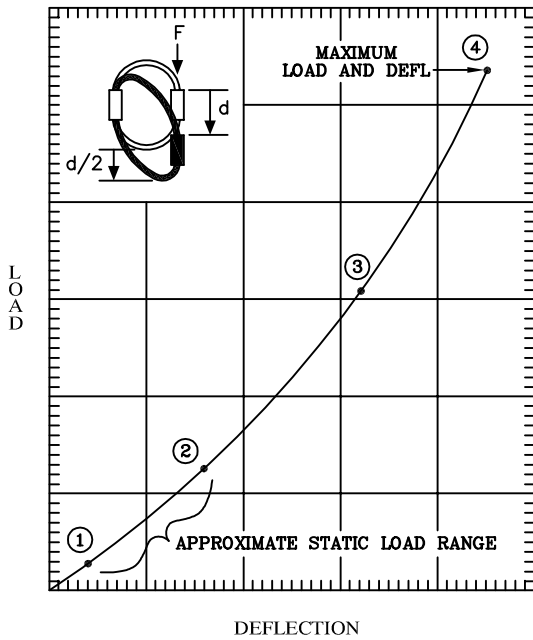

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	350	.10	1000	.25	4600	1.25	13600	2.50	3500	3700
M40-850-08	225	.10	675	.25	3850	2.00	11500	4.00	2250	2400
M40-925-08	175	.10	500	.25	3000	2.50	9600	5.00	1750	1800




45° COMPRESSION/ROLL

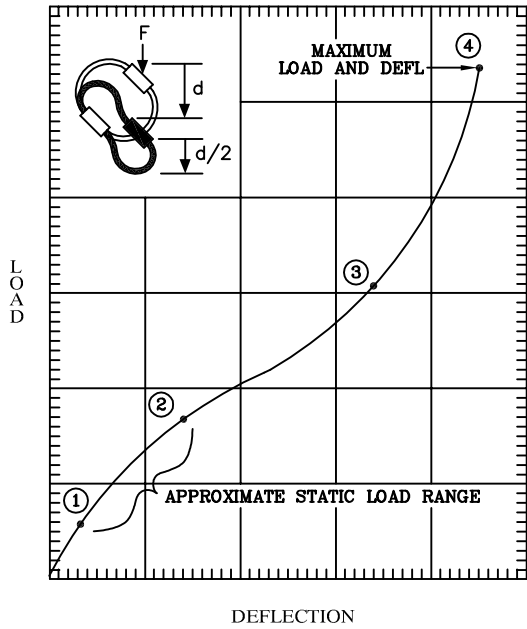

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	750	.10	2000	.25	8500	2.50	10800	3.50	7500	3600
M40-850-08	500	.10	1300	.25	7200	4.00	9000	5.50	5000	2000
M40-925-08	400	.10	1000	.25	6000	5.00	7500	7.00	4000	1500

45° TENSION/ROLL

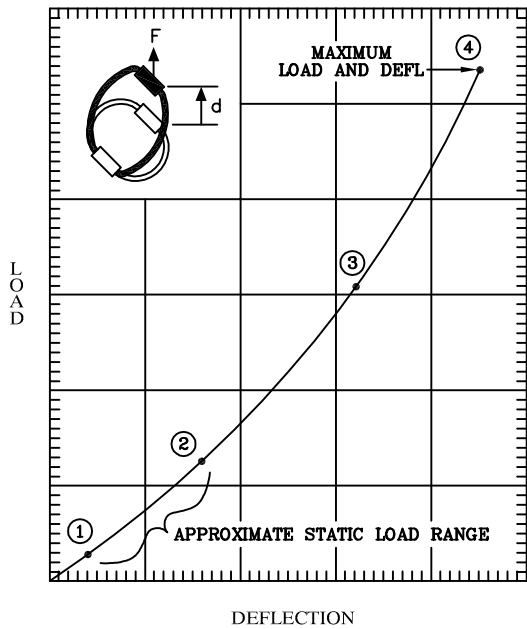

PART NO.	①		②		③		④		K _v (VIBE) (lbs/in)	K _s (SHOCK) (lbs/in)
	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)	LOAD (lbs)	DEFL (in)		
M40-700-08	825	.10	2600	.25	11500	.88	28000	1.75	8250	12500
M40-850-08	550	.10	1700	.25	11000	1.38	26000	2.75	5500	8000
M40-925-08	450	.10	1300	.25	10500	1.75	24000	3.50	4500	6000

TOLL FREE : 888-ISOLATOR
 FAX : (631) 491-5672
 WEB SITE : www.isolator.com
 E-MAIL : sales@isolator.com
 CAGE : 07QQ7

